

## Designo Control Point

### BACnet/IP Touch panels 7.0", 10.1" and 15.6"


PXM30.E, PXM40.E, PXM50.E and wall-mount frames PXA.V40, PXA.V50



**High-quality touch panels for technical on-site operation of plants as well as room operation.**

- Optimized for local on-site operation of the Designo building automation and control system
- Integrated web server with HTML5.0 interface
- Generic operation and monitoring of plant functions (alarms, schedulers, calendars, setpoint changes, display of actual values, etc.)
- Offline engineering of customized graphics with ABT site
- Compact design featuring a low installation depth for mounting in panel doors
- Wall mounting with installation frames for PXM40.E, PXM50.E (ordered separately)
- High-resolution, capacitive touch displays (landscape)
- LED to display alarms on an inactive screen
- Operating voltage AC 24 V, DC 24 V, or Power over Ethernet (PoE) (PXM40.E and PXM50.E)

## Use

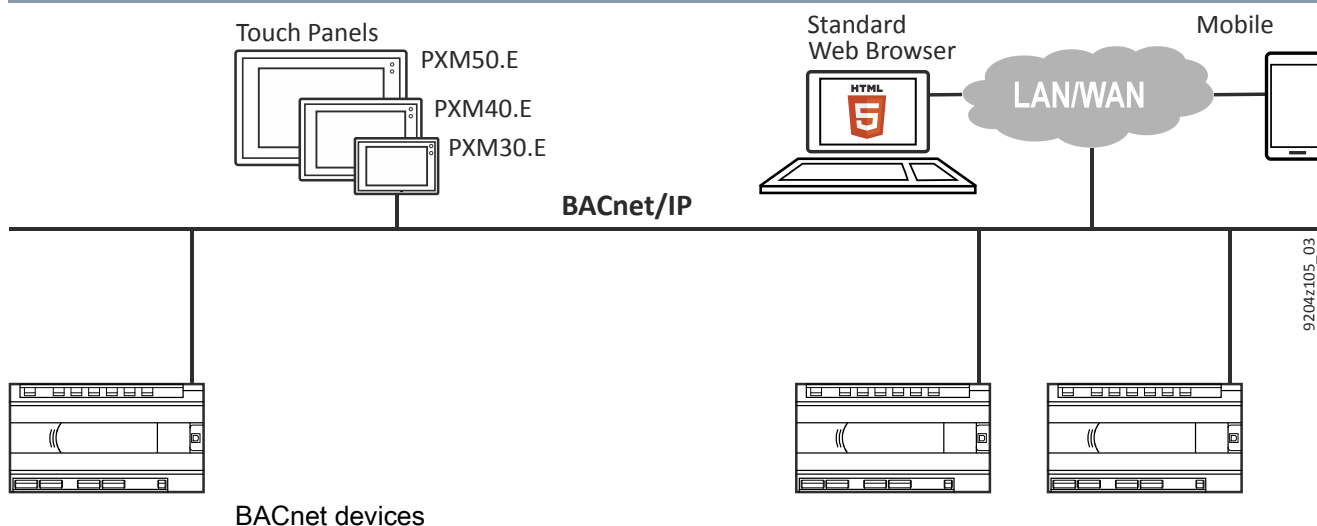

Touch panels are highly flexible and scalable:


- Plant operation by technicians
- Operation of various room environments by the end user.
- Examples: Offices, conference rooms, or even entire floors

The devices are suitable for installation in panel doors

A mounting frame is available for wall mounting PXM40.E and PXM50.E (ordered separately).

## Functions

Example for a plant graphic

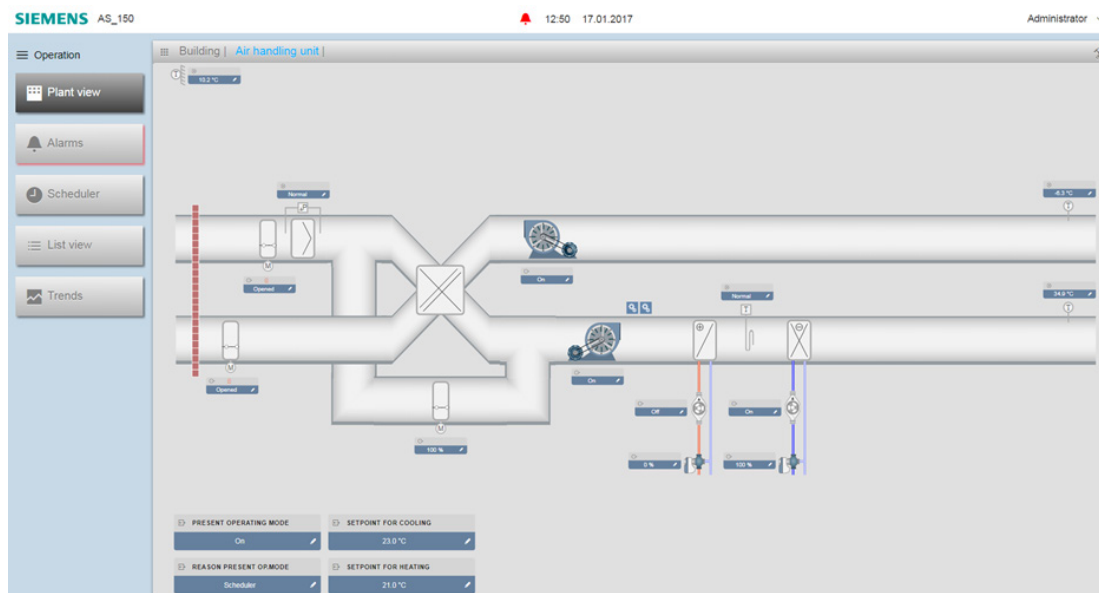

### Settings

Different settings are available, however, for user-friendly operation of the touch panel. They can be edited after login.

For details, see "Desigo Touch Panel client commissioning", A6V11604303.

Function	Description		
Brightness	Sets the screen's brightness.		
Time format	24 hours or 12 hours (am/pm).		
Date format	8 variants are available.		
Language	Touch panel operating language: Supports 20 languages; the factory setting for the user interface is English.		
	Arabic Danish English Finnish French German Hindi	Italian Japanese Korean Norwegian Persian/Farsi Polish Portuguese	Rumanian Russian Simplified Chinese Traditional Chinese Spanish Swedish Turkish
Keyboard	The interaction with the keyboard is roughly the same as commercially available products such as smart phones, tablets, etc.		
Auto logout	Time to logout: 5, 10, 15, 30, 45, 60 minutes The automatic logout can be set at intervals of 5 to 60 minutes, including the ability to suppress automatic logout for certain technical reasons.		
Screensaver	On after 15 minutes, factory setting: On		

### Function overview

For functions and system limits, see:

- Desigo Control Point engineering manual, A6V11604297
- Desigo Control Point documentation on basics, A6V11666339

### Type summary

Type	Stock number	Description
PXM30.E	S55623-H128	BACnet/IP Touch Panel 7" with integrated web server
PXM40.E	S55623-H129	BACnet/IP Touch Panel 10" with integrated web server
PXM50.E	S55623-H130	BACnet/IP Touch Panel 15" with integrated web server

### Accessories

Type	Stock number	Description
PXA.V40	S55842-Z119	Wall-mount frames for PXM40.E
PXA.V50	S55842-Z120	Wall-mount frames for PXM50.E

The wall-mount frames must be ordered separately.

### Product documentation


Document	Document no.
Desigo Control Point Basic documentation	A6V11666339
Desigo Touch-Panel Clients Commissioning	A6V11604303
Desigo Control Point Operation manual	A6V11211557
Desigo Control Point Engineering manual	A6V11604297
ABT Site Online help	- -

Related documents such as the environmental declarations, CE declarations, etc., can be downloaded from the following Internet address:

<https://siemens.com/bt/download>

## Safety

---

	<b>⚠ CAUTION</b>
	<p><b>National safety regulations</b></p> <p>Failure to comply with national safety regulations may result in personal injury and property damage.</p> <ul style="list-style-type: none"> <li>• Observe national provisions and comply with the appropriate safety regulations.</li> </ul>

## Engineering

---

For additional information on cable lengths, topology, etc.:  
See Desigo Control Point documentation on basics, A6V11666343.

## Mounting

---

### Mounting types

Touch panels are designed for

- Mounting in the panel door
- Installation in hollow walls using separately ordered installation frames (PXM40.E, PXM50.E)

### Mounting instructions

Mounting installations are printed on the unit's packaging material.

### Cut outs for panel installation and wall mounting

See "Dimensions".

## Installation

---

Power is connected to a plug-in screw terminal block.  
This connection is not required for Power over Ethernet (PoE).

## Commissioning

---

Touch panels can be commissioned without tools.  
All necessary network parameters can be entered directly on the unit.  
No additional engineering required for operation using default views.  
Each device has a unique identification number to ensure efficient commissioning.  
It is also printed on the removable barcode label.

## Operation - LED behavior

Color	Activity	Function
Green	Off	Device is not powered
	Flashing	Start-up or the program is stopped
	On	Device is operational
Red	Off	OK
	On	Program error Pending alarm Hardware fault
	Flashing 1 Hz	Wrong or corrupt software No application loaded Faulty server-link configuration
	Flashes in wink command rhythm	Physical device ID

## Maintenance

### Cleaning

Touch panels are maintenance free.

Dirt on the display can be cleaned using off-the-shelf display cleaners for smart phones, a moist rag, and/or off-the-shelf microfiber cloth for monitors or glasses.

Recommended products:

- Lysol towel
- Clorex towel
- Water with 2% alcohol
- Damp microfiber cloth
- H<sub>2</sub>O<sub>2</sub> hydrogen peroxide
- Sterillium® Classic Pure

### Firmware upgrade

You can update the firmware with ABT Site.

### Repair

The devices cannot be repaired. The entire unit must be replaced.

## Disposal



The device is considered an electronic device for disposal in accordance with the European Guidelines and may not be disposed of as domestic garbage.

- Dispose of the device through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

## Power supply

Operating voltage Safety Extra-Low Voltage SELV or Protection by Extra Low Voltage per HD384	AC 24 V $\pm 20\%$ (SELV / PELV) AC 24 V class 2 (US) DC 24 V $\pm 15\%$ (SELV / PELV) DC 24 V class 2 (US) DC 48 V (PoE Class 4, alternative A))		
PoE: PoE switches and injectors must comply with IEEE 802.3at			
Frequency	50/60 Hz		
Maximum power consumption At AC 24 V At DC 24 V PoE *)	<b>PXM30.E</b> Max. 29 VA Max. 17 W --	<b>PXM40.E</b> Max. 32 VA Max. 21 W Max. 22 W *)	<b>PXM50.E</b> Max. 42 VA Max. 26 W Max. 25 W *)
*) Applies to normal operation. Can be higher at start-up (IEEE 802.3at Class 4)			
Processor	Texas Instruments AM5727, 1.5 GHz, Dual Core		
Storage	8 GB eMMC, 2 GB SDRAM (DDR3L)		
Screw terminals for wire cross sections up to	2.5 mm <sup>2</sup>		
External supply line fusing (EU) <i>At AC / DC 24 V power</i>	Non-renewable fuse max. 10 A slow or circuit breaker max. 13 A Tripping characteristic B, C, D per EN 60898 or Power supply with current limitation of max. 10 A		

## Display

	PXM40.E	PXM40.E	PXM50.E
Size	7.0"	10.1"	15.6"
Resolution	1024 x 600	1280 x 800	1366 x 768
Type	TFT		
Number of colors	16.2 mn		
Viewing angle H/V typical	120 / 110°	150 / 145°	
Backlit display	LED, dimmable		
Touch pad	Projective capacitive		

## Connections

Screw terminals, plug-in	
Cu-wire or Cu-strand with wire end sleeve	1 x 0.6 mm $\varnothing$ to 2.5mm <sup>2</sup> (22 to 14 AWG) or 2 x 0.6 mm $\varnothing$ to 1.0 mm <sup>2</sup> (22 to 18 AWG)
Cu-strand without wire end sleeve	1 x 0.6 mm $\varnothing$ to 2.5 mm <sup>2</sup> (22 to 14 AWG) or 2 x 0.6 mm $\varnothing$ to 1.5 mm <sup>2</sup> (22 to 16 AWG)
Stripping length	6...7.5 mm (0.24...0.29 in)
Slotted screws	Screwdriver, size 1 with shaft $\varnothing \leq 4.5$ mm
Max. tightening torque	0.6 Nm (0.44 lb ft)

Ethernet interface	
Plug	2 x RJ45, screened
Interface type	100BASE-TX, IEEE 802.3 compatible
Bit rate	10/100 Mbps, autosensing
Protocol	BACnet over UDP/IP
Galvanic isolation of system neutral $\perp$	Yes

Interface USB 2.0	
Plug	Type B (device)
Data rate (USB 2.0 full speed)	12 Mbps
Protective switch against surges and over current	Yes
Galvanic isolation of system neutral $\perp$	No

## Conformity

Ambient conditions and protection classification	
Assigned per EN 62368-1	<ul style="list-style-type: none"> <li>Degree of pollution</li> <li>Overvoltage category</li> </ul>
Design	Device suited for use with equipment of safety classes I and II
Degree of protection of housing to EN 60529	<ul style="list-style-type: none"> <li>From the front</li> <li>From the back (panel mounted)</li> </ul>
Climatic ambient conditions	<ul style="list-style-type: none"> <li>Transport (packaged for transport) as per EN 60721-3-2</li> <li>Operation per EN 60721-3-3 (wall mounted)</li> <li>Operation per EN 60721-3-3 (panel mounted)</li> </ul>
Mechanical ambient conditions	<ul style="list-style-type: none"> <li>Transport to EN 60721-3-2</li> <li>Operation per EN 60721-3-3</li> </ul>
Elevation above sea level	Max. 3,000 m above sea level

Standards, directives and approvals	
Product standard EN 62368-1	Information Technology Equipment - Safety - Part 1
Electromagnetic compatibility	For residential, commercial, and industrial environments
EU conformity (CE)	See CE declaration CM1T9292xx <sup>1)</sup>
EAC compliance	Eurasian compliance
RCM Conformity	See RCM declaration CM1T9292en_C1 <sup>1)</sup>
UL approbation (US)	UL 916, <a href="http://ul.com/database">http://ul.com/database</a>
cUL-Approbation (Canada)	cUL 916, <a href="http://ul.com/database">http://ul.com/database</a>
FCC	CFR 47 Part 15 Class B
CSA certification	C22.2, <a href="http://csagroup.org">http://csagroup.org</a>
BTL certified	B-OD
Environmental compatibility <sup>1)</sup>	The product environmental declaration contains data on environmentally compatible product design and assessments (RoHS compliance, materials composition, packaging, environmental benefit, disposal).

<sup>1)</sup> Documents can be downloaded at <http://siemens.com/bt/download>.


## Housing

	PXM30.E	PXM40.E	PXM50.E
Dimensions	See "Dimensions"		
Color	Plastic frame; Glass, reflecting	Matt aluminum frames; glass, reflecting	
Weight with/without packaging	1117 / 1745	1810 / 2264 g	3788 / 4662 g

	PXA.V40	PXA.V50
Dimensions	See "Dimensions"	
Color	Steel, zinc-plated	
Weight with/without packaging	1206 / 1640 g	2104 / 2917 g


## Connection terminals, service button

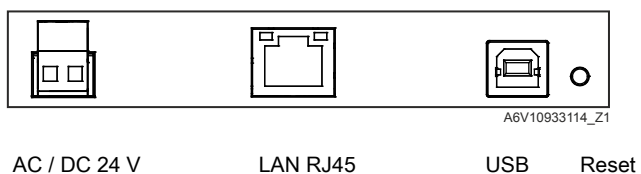


## Dimensions

All dimensions provided in mm and inches.

### PXM30.E

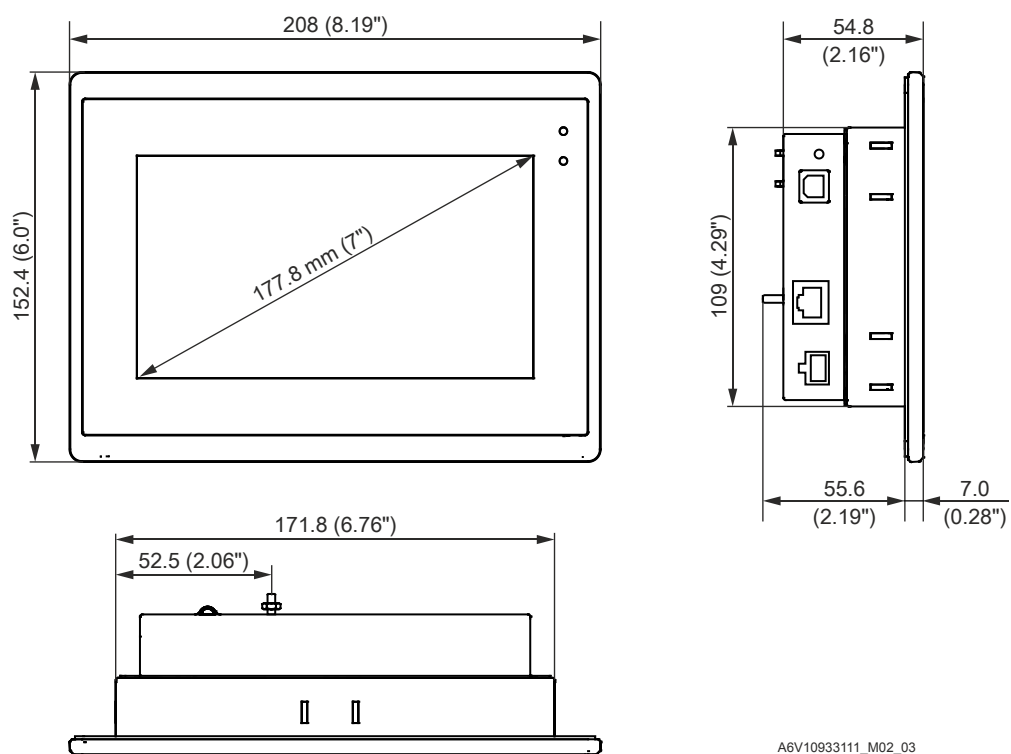


### Panel cut out

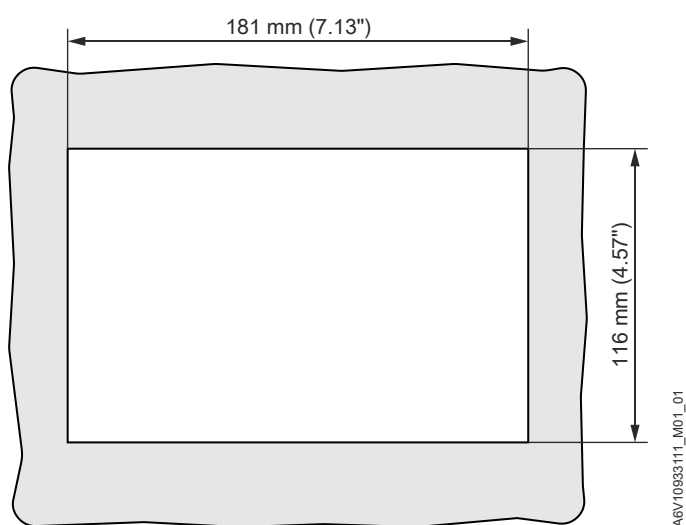





## PXM40.E

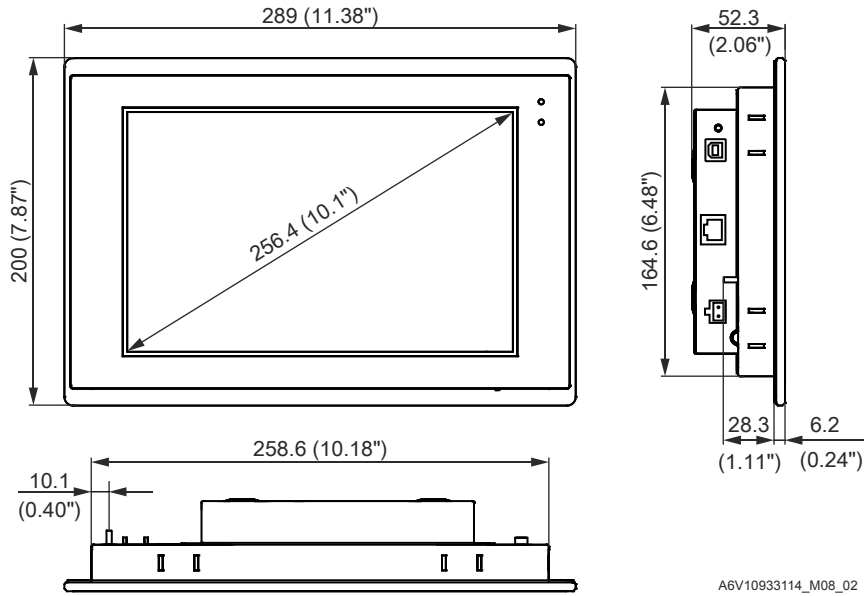


## PXA.V40

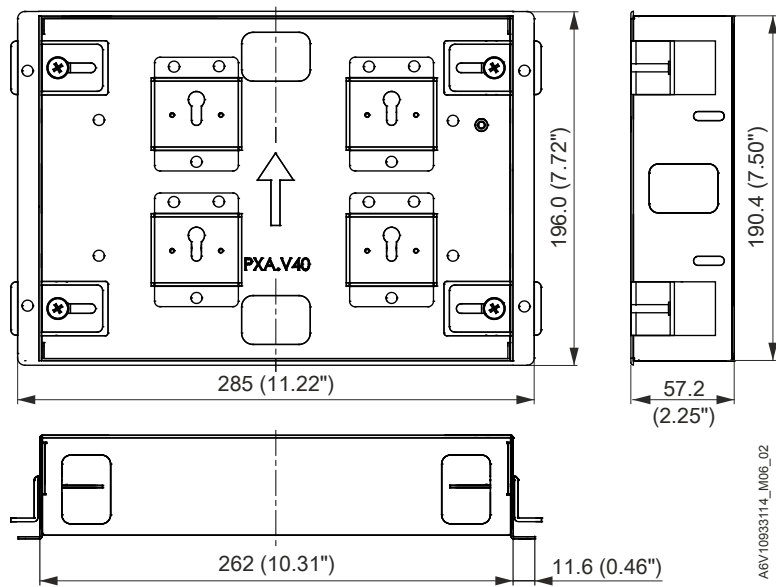


Panel cut out

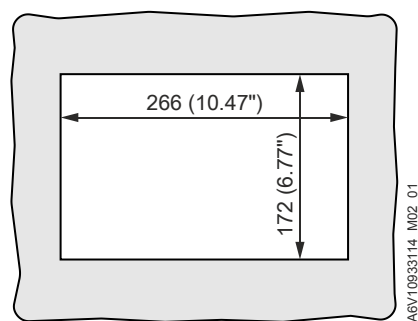

Wall cut out

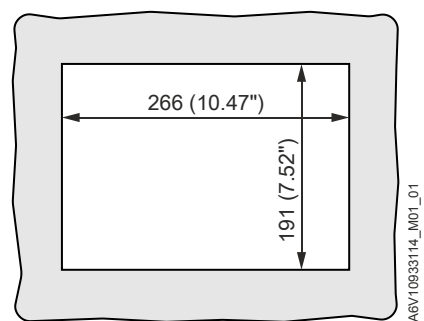


## PXM50.E

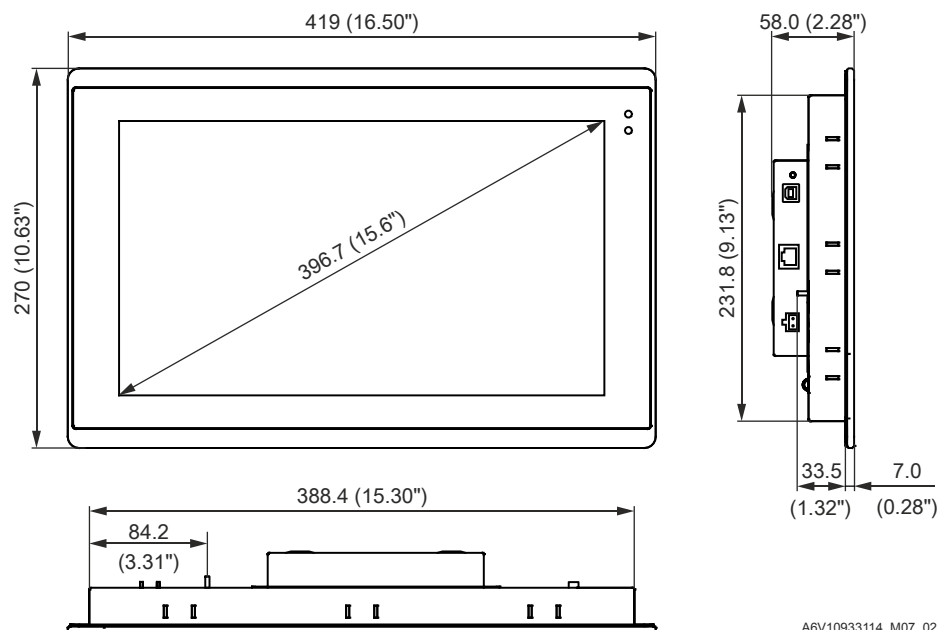


A6V10933114\_M07\_02

## PXA-V50

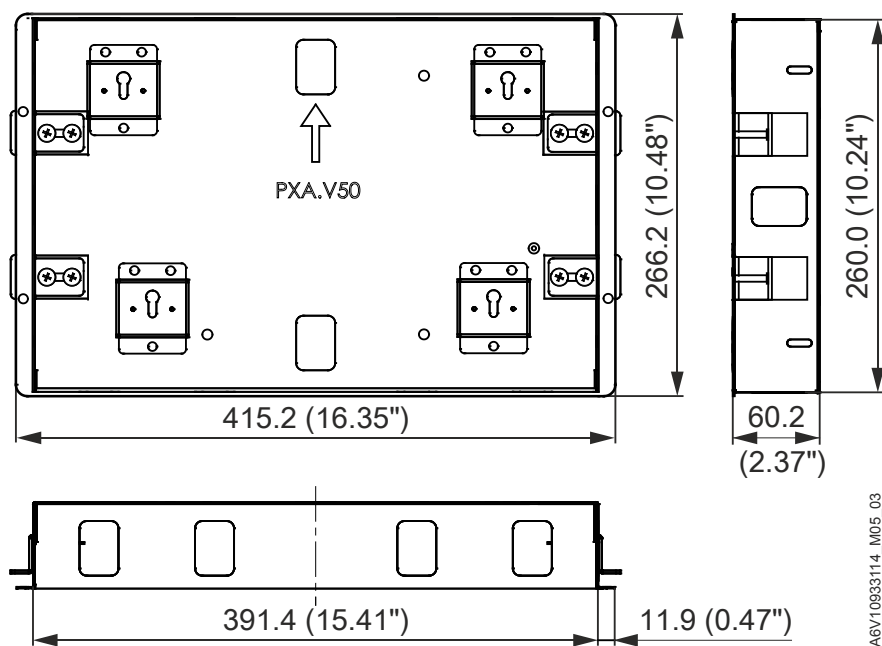


A6V10933114\_M05\_03

### Panel cut out

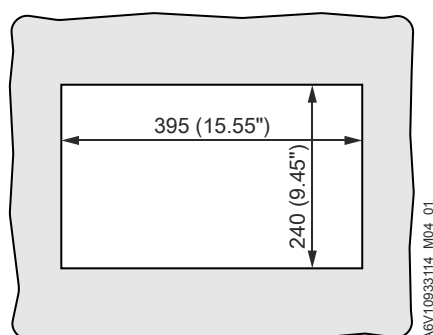

A6V10933114\_M04\_01

### Wall cut out

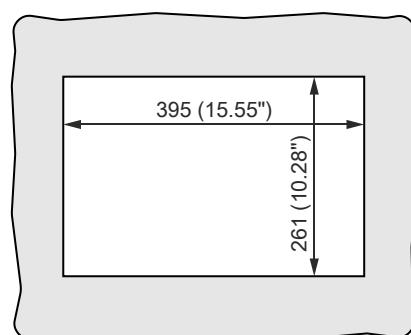

A6V10933114\_M03\_01

## Trademarks



Oracle and Java are trademarks or registered trademarks of Oracle Inc.

Issued by  
Siemens Switzerland Ltd  
Building Technologies Division  
International Headquarters  
Theilerstrasse 1a  
CH-6300 Zug  
Tel. +41 58 724 2424  
[www.siemens.com/buildingtechnologies](http://www.siemens.com/buildingtechnologies)

© Siemens Switzerland Ltd, 2019  
Technical specifications and availability subject to change without notice.