



Double thermostat

Control Thermostats / RAZ-ST.... Safety Limit Thermostats

Combination of electromechanical TR and STB according to DIN EN 14597

- 2-position control thermostat and safety limit thermostat with single-pole changeover microswitches
- Switching capacity of microswitches
 - contact connection 1-2, 16 (2.5) A, AC 250 V
 - contact connection 1-4, 6 (2.5) A, AC 250 V
- STB: contact connection 1-4, 2 (0.4) A, AC 250 V (Alarm contact)
- Push-in connection terminals¹⁾ for fast installation
- Time constant conforming to DIN EN 14579
- 2 mounting choices: pocket or wall mounting
- External setting knob for setpoint adjustment
- Internal adjustment of switch-off temperature of safety limit thermostat (STB); switch-off temperature can be checked through the viewing window in the housing
- Ambient temperature compensation for switching mechanism and capillary tube (on STB)
- Fail-safe design, rupture of the capillary tube causes contact connection 1-2 to open
- Internal reset facility covered by removable threaded nipple

Use

Typical applications:

- Heat generation plant
- For general use in heating, ventilation and air conditioning plant

Function

When the adjustable setpoint of the control thermostat RAZ-TR is reached on rising temperature, contact connection 1-2 changes over to contact connection 1-4. When the temperature of the medium falls by the value of the switching differential, the RAZ-TR reverts to contact connection 1-2.

When the switch-off temperature of the safety limit thermostat TR-STB is reached, contact connection 1-2 changes over to contact connection 1-4 (alarm) and the RAZ-STB remains tripped in this position. When the temperature of the medium falls by the value of the switching differential, the thermostat must be manually reset after removal of the threaded nipple.

Should the expansion liquid escape through a leak in the sensing system of the safety limit thermostat RAZ-STB, the pressure in the diaphragm drops, causing the contact connection to mechanically 1-2 off.

Type summary

Product number	Stock number	Control and switch-off temperature range	Capillary tube length	Scope of delivery
RAZ-ST.011FP-J	S55700-P136	(TR) 15...95 °C (STB) 100 °C	700 mm	Double pocket for 2 sensing elements, 100mm length, ALT-DB100J , brass nickel-plated, PN10), cable gland M20 x 1.5 mm Mounting instructions
RAZ-ST.030FP-J	S55700-P137	(TR) 15...95 °C (STB) 110 °C		
RAZ-ST.1500P-J	S55700-P138	(TR) 15...95 °C (STB) 110...130 °C		
RAZ-ST.1510P-J	S55700-P139	(TR) 15...95 °C (STB) 90..110 °C		

Accessories

Refer to Data Sheets N1193 and N1194.

Important: Double pocket (**ALT-DB..J**) with the ending „J“ fits to this RAZ units only.

Ordering

When ordering, please give type reference according to “Type summary“ (standard set).

If the accessories required are not those included in the standard set, they can be ordered separately according to the type reference given in Data Sheets N1193 and N1194.

Mechanical design

Housing

The base of the thermostat is made of PA (reinforced) and is designed for protection pocket and wall mounting; the electromechanical control thermostat (TR) and the safety limit thermostat (STB) use 2 separate capillary type sensing elements.

The cover accommodates the setpoint setting knob, the viewing window and the removable threaded nipple for resetting the safety limit thermostat.

The cable entry gland is M20 x 1.5 mm.

Notes

Mounting aid

Installation Instructions are enclosed in the package.

Mounting location

It must be ensured that there is sufficient clearance above the thermostat for seeing through the viewing window, for adjusting the setpoint and the switch-off temperature and for removing and replacing the thermostat, if required.

Pocket mounting

Mount the pocket and adjust the hexagon as required. Immerse the capillary sensing element in the pocket and secure the base to the pocket by means of the screw.

Wall mounting with sensing element in the pocket


To prepare for wall mounting, knock out the fixing holes in the housing and pull out the capillary tube until the required length is reached. After immersing the capillary sensing elements in the pocket, secure them with a clamp (mounting accessories).

 Temperature setting

The switch-off temperature (e.g. 110..130 °C) must be adjusted only by qualified personnel.

 Wiring


The appliance must be wired by the installer only.
The cables used must meet the insulation requirements for mains voltage.
Wire the thermostat according to the connection diagram and in compliance with local regulations.
In case of rupture of the capillary tube, contact 1-2 will open (fail-safe function). In this state, contact 1-2 will remain open and, for this reason may not be used as part of the safety chain.

 Max. AC 250 V

Caution: prior to opening the housing, disconnect the thermostat from the mains supply.



Earth connections must be made in compliance with the regulations.




Disposal

The device is a waste electronic equipment in terms of the European Directive 2002/96/EC (WEEE) and should not be disposed as part of unsorted municipal waste. The relevant national legal rules are to be paid attention. Use for disposal the systems set up to collect electronic waste. Observe all local and applicable laws.


Technical data

Switching mechanism of TR and STB	Switching capacity TR			
	Nominal voltage		AC 24...250 V	
	Nominal current $I (I_M)$	contact connection 1-2		0.1...16 (2.5) A
		contact connection 1-4		0.1...6 (2.5) A
	Switching capacity STB			
	Nominal voltage range		AC 24...250 V	
	Nominal current range $I (I_M)$	contact connection 1-2		0.1...16 (2.5) A
		contact connection 1-4		0.1...2 (0.4) A (e.g. alarm contact)
		External fuse		16 A
	Life expectancy at nominal rating	TR		min. 250 000 switching cycles
STB			min. 300 switching cycles	
Safety class			I to EN 60 730	
Degree of protection			IP 40 to EN 60 529	
Functional data	Externally adjustable temperature TR			
	RAZ-ST.011FP-J		15...95 °C	
	RAZ-ST.030FP-J		15...95 °C	
	RAZ-ST.1500FP-J		15...95 °C	
	RAZ-ST.1510FP-J		15...95 °C	
	Safety limit thermostat STB			
	Internally adjustable safety switch-off temperature			
	RAZ-ST.011F-J		100 °C (fixed)	
	RAZ-ST.030F-J		110 °C (fixed)	
	Internally adjustable safety switch-off temperature for	RAZ-ST.1500-J		110...130 °C (with tool)
RAZ-ST.1510-J			90...110 °C (with tool)	

Norms and standards	Thermal switching differential TR STB (fixed) STB adjustable	6 K (range dependent) max. temperature ± 5 K max. temperature ± 5 K
	CE conformity Electromagnetic compatibility directive Low voltage directive Pressure equipment directive	25004/108/EEC 2006/95/EEC 97/23/EC (CE 0036)
	ENEC (European Norms Electrical Certification)	
	DIN EN 14597 RAZ-ST.1500P-J / . 1510P-J	TR118107 STB118407
	C-tick	 N474
Environmental conditions	Product standards Automatic electrical controls for household and similar use	EN 60 730-1
	Special requirements placed on temperature-dependent controls Type 2 action (TR) Type 2 action (STB)	EN 60 730-2-9 BDFHKL (EN 60 730-1/2-9) EN14597 BFHKLNPV (EN 60 730-1/2-9) EN14597
	Radio interference protection	click rate $N \leq 5$ to EN 55 014
	Operation	class 3K5 to IEC 60 721-3-3
	Max. temperature on bulb RAZ-ST.011FP-J RAZ-ST.030FP-J RAK-ST.1500P-J/ 1510-P-J	max. switch-off temperature + 25 K max. switch-off temperature + 25 K max. switch-off temperature + 25 K
	Ambient temperature at the housing Humidity Mechanism	max. 80 °C (T80) < 95 % r.h. class 3M2 to IEC 60 721-3-3
	Storage and transport Ambient temperature Humidity	class 2K3 to IEC 60 721-3-2 -25...+70 °C < 95 % r.h.
	Max. temperature socket	125 °C
	Degree of pollution	normal to EN 60 730
	Controlled medium	Water, oil and air
	Influence of the ambient temperature on TR	-0.18 °C/°C
	Calibration	Ambient temperature compensation for switching mechanism and capillary tube (on STB)
Manufacturing deviation TR STB		± 3 °C +0 / -6 °C
Drift after life expectancy TR and STB		< ± 5 %
Calibrated for ambient temperature at the switching mechanism and capillary tube		22 °C to DIN 14597
Time constant in: water oil air		<45 s to DIN 14597 <60 s to DIN 14597 <120 s to DIN 14597
Connections		Electrical connections
	Earth connection	Push-in ¹ terminals for wires 2 x 0.75...2.5 mm ²
	Cable entry gland	M20 x 1.5 mm
	External wiring flexible cord	Type M attachment (designed to be connected with prepared conductors, e.g. ferrules)
General data	Housing colors	base RAL 7001 (dark-grey) cover RAL 7035 (light-grey)
	Dim. of sensing elements TR and STB fixed STB adjustable	6.5 mm dia. x 85 mm 6.5 mm dia. x 76 mm

Capillary length	700 mm
Min. bending radius of capillary	R min. = 5 mm
Construction	
Carrier of switching mechanism	plastic
Capillary tubes and sensing elements	copper
Diaphragms	stainless steel
Weight of standard set	0.53 kg

Connection diagram

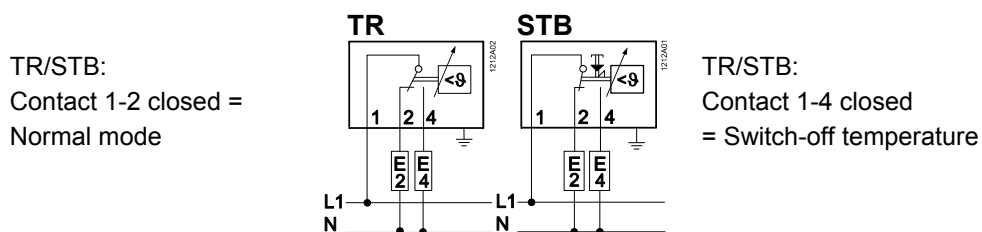

¹⁾ "Push In" is a patented connection technique developed by Weidmüller, Germany's leading manufacturer of electrical connection technology

Dimensions

